

# NUURA



## LIILA 12 WALL/CEILING - Optic

Design: Sofie Refer, 2018. US-model.

**Liila 12 Wall/Ceiling in mouth blown Optic Clear glass and Nordic Gold finish.**

Liila Collection has a Nordic simplistic yet sensuous look due to the fine reflections in the glass and metal. The mouth blown glass is elegantly framed by the metal disc in soft metallic finish.


While the version in Optic Clear glass creates sparkling reflections, the version in Opal White glass completes the minimalistic Nordic look.

**Liila 12 Wall/Ceiling** is a unique interpretation of the classic chandelier - a sensuous lighting sculpture that reflects the abundance of nature.

### Liila collection:

The Liila collection include the following products:

- Liila 1 Wall/Ceiling / Optic
- Liila 1 Wall/Ceiling / Opal
- Liila 1 Large Wall/Ceiling / Optic
- Liila 1 Large Wall/Ceiling / Opal
- Liila 12 Wall/Ceiling / Optic
- Liila 12 Wall/Ceiling / Opal

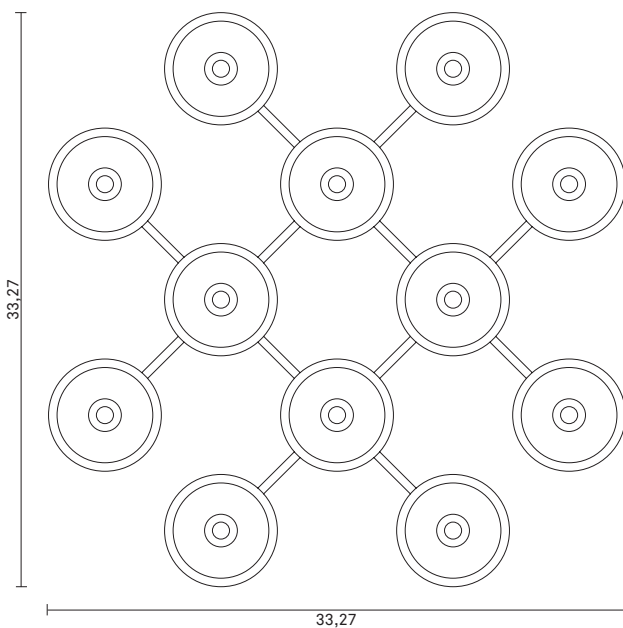

## TECHNICAL INFO

**Product no.:** 94120123

**Type:** Wall Light - Indoor

**Colour:**

Glass: Optic Clear

Metal: Nordic Gold

**Materials:**

Powder coated metal

Mouth-blown glass

**Dimensions:**

33,27in x 33,27in

**Product weight:**

Product: 14300 g

**Packaging:**

Dimensions: L: 34,25in x W: 34,06in x H: 9,06in

Weight: 6200 g

Total weight incl. product: 20500 g

Number of parcels: 1

Material: Brown cardboard.

**Packaging - weight - material:**

Cardboard outside: 3500 g

Cardboard inside: 2560 g

Bubble wrap: 140 g

Plastic bag: 0 g

**Cleaning:**

Use a soft dry cloth to clean the product.

Do not use household cleaners.

**Certifications and labels:**

CE - CE-certified

IP20 - IP20

⊕ - Class II

This fixture is fabricated with UL rated components, but the fixture itself is not UL listed. This option may be available for an additional fee.

**Light source:**

Socket: G9

Max wattage: 7W LED (Bulb not included)

Voltage (V): 120V

**Recommended light source:**

Equivalent to Illumination G9 (344-07), 2.3W

**Dimmability:**

Can be fitted with an aligned dimmer.

**DALI compatible**

