




AMBIT PENDANT LAMP – EU VERSION

TAF STUDIO ON THE DESIGN “What defines our attraction to shapes? With the Ambit Pendant Lamp, we wanted to explore form and proportions in a thorough and meticulous way. We discovered a unique dynamic between linear and rounded shapes that gives the lamp its unique outline, making the Ambit Pendant Lamp a timeless design that you’ll never grow tired of while its handspun aluminum material and contrasting white inner makes for an elegant touch.”



Ø40 & Ø25



Ø16,5



DESIGNED BY / YEAR OF DESIGN

TAF Studio / 2015

ABOUT THE DESIGNER

TAF Studio is a Stockholm-based design and architecture studio making international headlines within product and interior design.

CATEGORY

Pendant lamp

ENVIRONMENT

Indoor

DESCRIPTION

Embodying the values of Scandinavian design, the Ambit Pendant Lamp is as timeless as it is contemporary. Made of hand-spun aluminum that has been hand-painted, the Ambit Pendant Lamp has a white interior to heighten contrasts of its outside shade and enhance the light omitted.

PRODUCTION PROCESS

Made from old brazier traditions, the lamp shade is press spun by hand. Hereafter, the lamp shade is polished and painted by hand.

MATERIAL

Aluminum lamp shade and rubber cord.

CORD LENGTH

400 cm / 157,5"

BULB INCLUDED

Ø40: No

Ø25: No

Ø16,5: Yes

CEILING CAP INCLUDED

Yes - White

DIMMABLE FUNCTION

No

CLEANING AND CARE

Clean the lamp with a soft dry cloth. Always switch off the electricity before cleaning.



AMBIT PENDANT LAMP - EU VERSION




LAMP RATING Ø40

Voltage	220-240V
Frequency	50/60Hz
IP Rating	IP20
Classification	Class II
Socket	1 x E27
	Max. 60W; incandescent lamp; type G
	Max. 13W; self-ballasted
	Max. 18W; self-ballasted LED bulb

LAMP RATING Ø25

Voltage	220-240V
Frequency	50/60Hz
IP Rating	IP20
Classification	Class II
Socket	1 x E14
	Max. 60W; incandescent lamp; Type G
	Max. 13W; self-ballasted; Type G
	Max. 11W; self-ballasted LED bulb; Type G

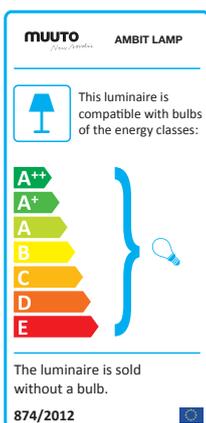

LAMP RATING Ø16.5

Voltage	220-240V
Frequency	50/60Hz
IP Rating	IP20
Classification	Class II
Socket	1 x GX53
	Max. 12W LED

BULB SPECIFICATION Ø16.5

Item	1x GX53 LED bulb, diffused
Watt	5,5W
Luminous flux	449
Color temperature	2700K
Lifetime	30000
CRI	90
Dimmable	Yes

GENERAL STANDARDS & CERTIFICATES - Ø40

EU/UK	USA/CANADA	CHINA
CE-LVD	UL	CCC
EN 60598-1:2008+A1:2009	UL 1598	GB7000.201-2008
EN 60598-2-1:1989	CAN/CSA C22.2 No. 250.0-08	GB7000.1-2007
EN 62493:2010		

WEEE Directive - 2012/19/EU

GENERAL STANDARDS & CERTIFICATES - Ø25 & Ø16,5

EU/UK	USA/CANADA	CHINA
CE-LVD	UL	CCC
EN 60598-1:2015	UL 1598	GB7000.201-2008
EN 60598-2-1:1989	CAN/CSA C22.2 No. 250.0-08	GB7000.1-2007
EN 62493:2010		

MUUTO